

FILTER AG + Series Filter
Installation Operation Maintenance Manual

Installation
Operation
Maintenance
Manual



FILTER AG + Filter
WS1, 1.5 & 2" Series Valve

Models

CAP 1054	CAP 1248
CAP1354	CAP1465
CAP1665	CAP1865
CAP2160	CAP2469

FILTER AG + Series Filter

Installation Operation Maintenance Manual

CONTENTS

1 UNPACKING AND PARTS LIST	3
1.1 UNPACKING NOTES	3
1.2 BASIC PARTS LIST	3
1.3 MISSING OR DAMAGED GOODS	3
2 TEMPORARY STORAGE	3
3.0 GENERAL NOTES	3
3.1 Turbidity Removal	3
3.2 System Management	4
4 REGENERATION/BACKWASH	4
4.1 The Backwash Process	4
4.2 TIME CLOCK CONTROL OF REGENERATION INITIATION	4
5 PRE-INSTALLATION CHECKS	4
5.1 MECHANICAL	4
5.1.1 Foundation/Drainage	4
5.1.2 Operating Space	5
5.1.3 Incoming Water	5
5.1.4 Pipework	5
5.1.5 Water Supply Company Requirements	5
5.2 ELECTRICAL	5
6 ASSEMBLY/INSTALLATION	6
6.1 MECHANICAL	6
6.1.1 Pipework	6
6.1.2 Drains and overflow connections	6
6.2 ASSEMBLY	6
7 COMMISSIONING	7
7.1 INTRODUCTION	7
7.2 Setting the Time of Day	8
Regeneration Programming	9
7.3 COMMISSIONING	11
8 ROUTINE MONITORING	11
9 FAULT FINDING AND RECTIFICATION	12
9.1 NO FLOW TO SERVICE	12
9.2 POOR TREATED WATER QUALITY	12
9.3 NO BACKWASH	12
9.4 UNSATISFACTORY CAPACITY BETWEEN BACKWASHES	12
10 WARRANTY AND SERVICE	13
10.1 AFTER SALE WARRANTY	13
11 TECHNICAL DATA	13
11.1 PROCESS AND OPERATING DATA	13
11.1.1 FILTER AG + CM1054 TO 1465	13
11.1.2 FILTER AG + CM1665 TO CM 2469	13
11.1.3 FILTER AG + CM3072 TO CM4272	Error! Bookmark not defined.
11.2 ENGINEERING DATA	14
11.2.1 FILTER AG + Series Filters CM1054 to CM 1465	14
11.2.2 FILTER AG + Series Filters CM1665 to CM 2469	14
11.2.3 FILTER AG + Series Filters CM3072 TO CM4272	Error! Bookmark not defined.
12.0 SPARES LIST	15
12.1 WS1 Valves	15
12.2 WS1.5 Valves	15
12.3 WS2 Valves	15
13 CE Certificate	16

FILTER AG + Series Filter

Installation Operation Maintenance Manual

1 UNPACKING AND PARTS LIST

1.1 UNPACKING NOTES

The unpacking of the Filter is quite straightforward, and there are no 'hidden' items. It is advisable to keep the packages sealed until such time as they are used, to prevent dust or water entry.

1.2 BASIC PARTS LIST

1. VALVE (c/w flow controllers on outlet and drain)
2. CLACK MANUAL
3. INSTRUCTIONS
4. VESSEL (c/w riser and distribution system)
5. 4" - 2 1/2" REDUCER (if required)
6. FILTER AG + (qty as specified)

1.3 MISSING OR DAMAGED GOODS

Immediately on receipt of the goods, it is advisable to check that all items ordered have been received. If you have any doubt that goods have been supplied as requested, please contact your supplier immediately. If any items are missing or damaged, the carrier and your supplier must be notified within 2 days of receipt if a claim is to be made.

2 TEMPORARY STORAGE

If installation is not to start immediately after delivery, the equipment should be stored in a clean dry area, where it will not be damaged, or be subjected to temperatures below freezing.

3.0 GENERAL NOTES

These instructions cover the FILTER AG + Range of filters, which includes model numbers from CAP1054 to CAP 2469.

It is recommended that these instructions are read thoroughly before commencing any work on the unit, particularly if you have no previous experience of installing and using a filter.

3.1 Turbidity Removal

Turbidity in the water is removed by filtration as the water passes through the bed. A support bed of gravel is used to protect the distributor and 2 grades of sand and anthracite to remove decreasingly smaller particles as the water passes through the

FILTER AG + Series Filter

Installation Operation Maintenance Manual

bed. By this method the whole depth of the bed can be used for filtration.

3.2 System Management

In order to remove accumulated deposits from the filter bed, the water flow through the filter is reversed (backwashed). Water is run to drain at a high rate to separate the filter media from the deposits. The control valve completes the backwash cycle automatically at the intervals and times set during installation. Backwash and fast rinse times are set for 20 minutes per cycle but can be altered to suit individual requirements.

All filter valves have the option of an additional volt free microswitch, which can be used to initiate a regen pump etc.

4 REGENERATION/BACKWASH

4.1 The Backwash Process

The backwash process consists of two stages:-

Backwash - Water flows upwards through the media bed, and out to a drain. As it does so it separates the deposits from the filter media and cleans off any particles of dirt or pipework corrosion products, which may have accumulated during the service cycle.

Fast Rinse - This follows the backwash cycle and entails rinsing away any residual deposits from the media and re-packing the media bed. This is carried out down flow with water flowing through the media in the direction of service.

4.2 TIME CLOCK CONTROL OF REGENERATION INITIATION

Most filter application systems are supplied with a time clock configuration valve, which initiate regeneration at a pre-set time (usually 2:00 AM) after a pre-set number of days. The frequency of regenerations is fully adjustable, but a minimum of once every 3 days is recommended.

5 PRE-INSTALLATION CHECKS

5.1 MECHANICAL

5.1.1 Foundation/Drainage

The filter will not require any special foundations, provided that a firm, level area, which is capable of supporting the working weight, is available. (See Engineering Data, Section 11.2)

Unwanted water from the backwash process must flow to drain, and so an open drain or gully, capable of passing the necessary flow is required (see Process and Operating Data, 11.1, for relevant flows). The total flow of

FILTER AG + Series Filter

Installation Operation Maintenance Manual

water to drain depends on site conditions, but will be at least the same as the service flow. Preferably the drain should be level but no higher than 500mm above the filter valve.

5.1.2 Operating Space

The space occupied by the filter can be found in the Engineering Data (Section 11 .2).

Access will be required to carry out adjustments or maintenance on the equipment. It is therefore recommended that a minimum of 500mm clearance be allowed around the unit for this purpose.

5.1.3 Incoming Water

The raw water to be fed to the filter must comply with the following:-

1. Maximum iron level = 20ppm
2. pH range = 6.0-9.0
3. Organic matter = less than 5ppm
4. Free chlorine = less than 0.5ppm
5. Chloride below 100 ppm
6. Temperature = 3 - 45[°]C (35 - 110[°]F)
7. No Oil or Polyphosphates
8. Backwash flow rate should be twice the service flow rate available with a pressure of 3 bar

5.1.4 Pipework

Pipework to be connected to the filter should not have an excessive amount of deposits. Piping that is heavily built up with scale (or Iron deposits) should be replaced.

Make sure that the pipework can be connected to the filter in such a way as to impose no stresses on the control valve, and that it is properly aligned and supported.

A system for the complete by-passing and isolation of the filter should be installed.

5.1.5 Water Supply Company Requirements

During backwash the accumulated debris is flushed to drain. Please contact your local Water Authority for advice on effluent issues if concerned with flow to drain.

5.2 ELECTRICAL

All filter valves are supplied as 12v complete with a transformer for 240v. A

FILTER AG + Series Filter

Installation Operation Maintenance Manual

continuous supply of 240v, 5 VA is required which should be provided by an uninterrupted mains supply, which is separately 1 Amp fused, and does not have any additional switch.

A plug is provided with this filter, the cable should be connected to fused spur outlet. However if that is not possible then a plug should be fitted to the cable with a 1 amp fuse. The socket used should be unswitched to prevent the filter from being inadvertently turned off.

6 ASSEMBLY/INSTALLATION

6.1 MECHANICAL

Check all the items against the parts list and shipping documents, and ensure you have them all before starting work. In addition to the filter you will require installation materials and basic tools, (i.e., spanners, screwdrivers etc., and PTFE tape)

6.1.1 Pipework

Pipework can be constructed from any normally acceptable material (Copper, Galvanised, Plastic), provided it is properly supported and aligned. Ensure that the pipe is sufficiently large to accommodate the flow of water required, making due allowance for the pressure drop between the filter and the point of discharge of treated water.

NOTE: IF BRAZED OR SOLDERED FITTINGS ARE TO BE USED, THE PIPE WORK MUST BE DISCONNECTED FROM THE VALVE DURING HEATING AND COOLING. EXCESS HEAT CAN CAUSE PERMANENT DAMAGE TO SOME OF THE VALVE COMPONENTS.

6.1.2 Drains and overflow connections

The drain connection from the backwash valves is a 3/4" or 1" BSPM thread for WS 1" 1 1/2" for WS 1.5 and 2". Flexible tube should be run from this spigot to a drain capable of taking the maximum flow in regeneration (see Section 11.2), and leaving a similar gap above the drain edge. The drain must not be higher than 500mm above the control valve and preferably should have an air break at the same height as the control valve.

6.2 ASSEMBLY

Refer to the installation diagrams in Section 13 and note the direction of flow through the system.

Ensure the installation site is clear and level.

Ensure that the piping system in the building transfers the treated water into a vented header tank to feed any hot water systems.

FILTER AG + Series Filter

Installation Operation Maintenance Manual

If possible, place the filter vessel into its final location before filling. Check that the riser tube has the cap in place before commencing filling.

Using a hose 1/3 fill the vessel with water. This is to prevent damage to the bottom distributor when pouring in the media.

Using a funnel slowly pour in the support gravel. Next, slowly pour in the Filter Sand, course first and then the Anthracite, taking care not to spill any on the floor and that the riser remains central in the vessel during filling.

After pouring in all of the filter media, the vessel should be, at most, 70-75% full. This is to allow rising space for the media during the backwashing cycle. Once the vessel is filled, immediately sweep up any spilled filter media.

Remove the cap from the riser tube and brush any debris out of the threads in the neck of the filter vessel.

Unpack the valve and reducer (if used). Screw the reducer into the filter vessel, then slip the valve down onto the distributor tube. No top distributor is used on filter valves to allow the maximum amount of debris to be backwashed off the media.

Screw the valve into the filter vessel, taking extreme care not to cross the threads. As the valve is being run into the vessel excessive force should not be required. Finally tighten to approximately 20ft.lbs torque.

Adjust the position of the filter vessel to line up with the pipework connections, not the position of the valve on the vessel.

Connect the inlet and outlet pipework to the valve using flexible connections or plastic high pressure piping. Flexible pipework is essential to prevent stress on the vessel as it cycles during service since it will expand and contract longitudinally.

Connect the drain line to the outlet of the drain line flow controller on the valve.

Ensure that there is an air break in the drain at the same height as the valve to prevent negative pressure on the vessel.

Connect the power supply to the valve and the unit is now ready for commissioning.

7 COMMISSIONING


7.1 INTRODUCTION

It is recommended that the commissioning of the plant is undertaken by a trained service engineer, who will be able to put the plant into service quickly, and most efficiently. However, if the services of an experienced engineer are not available, following the steps outlined below will result in the system being properly commissioned.

FILTER AG + Series Filter

Installation Operation Maintenance Manual

7.2 Setting the Time of Day

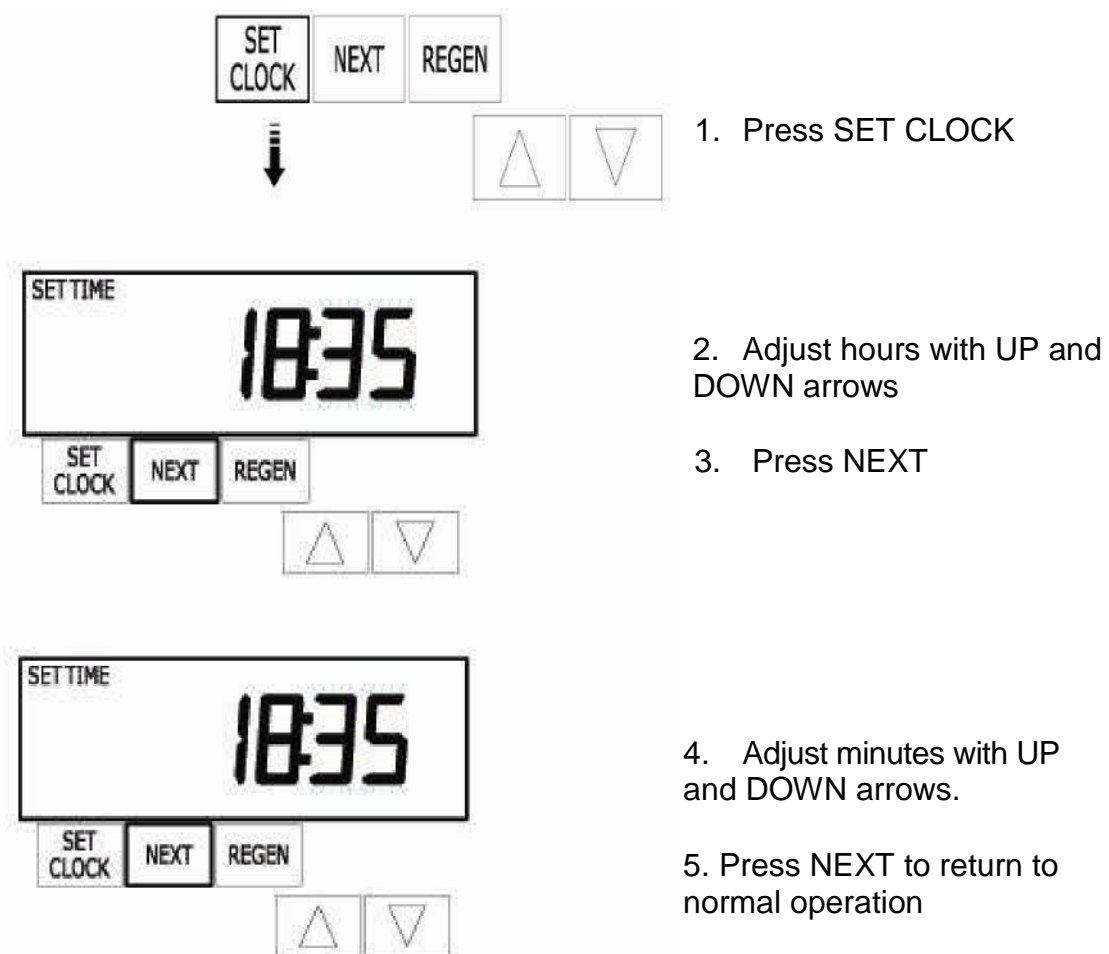

1. Press SET CLOCK

2. Adjust hours with UP and DOWN arrows

3. Press NEXT

4. Adjust minutes with UP and DOWN arrows.

5. Press NEXT to return to normal operation

The filter regeneration cycles have been factory programmed.
The time of day for regeneration to take place has been entered as 2.00 AM and this can be altered depending on site requirements.


FILTER AG + Series Filter

Installation Operation Maintenance Manual

Regeneration Programming


(All programming below is Factory set)

To alter settings – Press “□” and “□” keys To
back up at any stage – Press “REGEN” To save
any changes – Press “SET CLOCK”




Press and hold together for 5 seconds


“Filtering” will be flashing in top right corner




Set 1st cycle time in minutes –
BACKWASH set at 10 min




Set 2nd cycle time in minutes – RINSE set at 6min



Regen set to oFF



Regen set to NORMAL




Programming Finished – Return to time of day

FILTER AG + Series Filter

Installation Operation Maintenance Manual

User Programming

To alter settings – Press “□” and “□” keys To back up at any stage – Press “REGEN” To save any changes – Press “SET CLOCK”



Press together and hold for 5 seconds



Set influent Hardness to nA



Set effluent Hardness to nA



Set number of days to next regeneration (set to 3 days)



Set time for regeneration.

Time for Immediate regeneration valves cannot be altered and will show “on 0”

Returns to time of day

FILTER AG + Series Filter

Installation Operation Maintenance Manual

7.3 COMMISSIONING

The objective of commissioning is to fill the filter with water, check for leaks and prepare it for service. The simplest way to commission the unit is to initiate a backwash. This will eliminate the air from the system and flush the media prior to use.

Before opening the inlet water supply switch on the power, which will activate the piston motor and the timer motor.

Next, start a manual backwash by pressing the regen button for 3 sec or until the motor starts to turn.

When the motor has stopped switch off the power and slowly open the inlet water supply. At first, air will be expelled from the drain line, followed by water once the vessel is full. Allow water to run to drain on the backwash cycle for 10-15 minutes in order to rinse the filter media and remove any fines.

Turn the power back on and allow the complete a manual regen in full by pressing the regen button for 3 sec and allowing the valve to complete the cycle.

The filter is now commissioned.

8 ROUTINE MONITORING

The following recommendations are made to help the user of the filter confirm that it is performing as required, and to give early warning of possible problems. The operation of the filter is completely automatic, and should not require adjustment.

Weekly

Check the treated water quality with a test kit.

Monthly

Check raw water quality, and record. Compare with original quality and adjust frequency of backwash if required.

Six Monthly

Perform a chlorinated backwash to remove any organic build up on the media. Check filter media depth against original level.

Annually

Inspect and clean/replace as necessary the piston and the internal seals. A competent engineer familiar with Clack valves should perform

FILTER AG + Series Filter

Installation Operation Maintenance Manual

this.

9 FAULT FINDING AND RECTIFICATION

9.1 NO FLOW TO SERVICE

Check mains pressure is above 1.7 bar.

Check inlet water supply

Check inlet and outlet isolating valves are open.

Check service outlet valve is open.

Check pressure drop across media. If excessive, media may be fouled, or internals blocked. Initiate a backwash. If this does not free up the media the filter will need to be inspected and serviced by a competent engineer.

Backwash with chlorine solution to remove organic build up

9.2 POOR TREATED WATER QUALITY

Check manual by-pass closed.

Check raw water pressure above minimum. If flow is less than design rate, channeling of water can occur in media, which results in inadequate treatment.

Backwash with chlorine solution to remove organic build up

Increase frequency of backwash as media may be becoming overloaded.

Increase backwash flow.

Check piston and seals & spacers. Check raw

water analysis for changes

9.3 NO BACKWASH

Check electrical supply, fuses etc. satisfactory.

Check program.

Check timer motor is running.

Check drive motor runs, by manually initiating a backwash, and listening for drive motor as it advances between cycles. Replace if necessary.

9.4 UNSATISFACTORY CAPACITY BETWEEN

FILTER AG + Series Filter

Installation Operation Maintenance Manual

BACKWASHES

Increase frequency of backwash

Check age of media and media level

Backwash with chlorine solution to remove organic build up

Increase backwash flow

10 WARRANTY AND SERVICE

10.1 AFTER SALE WARRANTY

Your filter is covered by a parts warranty for a period of one year from installation or 14 months from purchase.

Consumable filter media is excluded from this warranty

Should you have any problems with your filter or require a routine service, please contact your supplier.

11 TECHNICAL DATA

11.1 PROCESS AND OPERATING DATA

11.1.1 FILTER AG + CAP 1054 TO 1465

Model		CAP 1054	CAP1248	CAP1354	CAP1465
Parameter	Units				
Flow Rate	M3/hr	0.6	0.85	1.0	1.2
Backwash Flow	M3/hr	1.2	1.7	2.0	2.4
Regeneration Time	Mins	20	20	20	20
Max. Operating Temperature	Degrees C	45	45	45	45

11.1.2 FILTER AG + CM1665 TO CM 2469

Model		CAP 1665	CAP1865	CAP2160	CAP2469
Parameter	Units				
Flow Rate	M3/hr	1.5	1.9	2.6	3.4
Backwash Flow	M3/hr	3.0	3.8	5.2	6.8
Regeneration Time	Mins	20	20	20	20
Max. Operating Temperature	Degrees C	45	45	45	45

FILTER AG + Series Filter

Installation Operation Maintenance Manual

11.2 ENGINEERING DATA

11.2.1 FILTER AG + Series Filters CAP1054 to CAP 1465

Model		CAP1054	CAP1248	CAP1354	CAP1465
Valve		WS1	WS1	WS1	WS1
Filter Vessel		1054	1248	1354	1465
Parameter	Unit				
Height of Filter	Mm	1607	1458	1601	1984
Diameter of Filter	Mm	254	305	331	356
Height of Valve	mm	170	170	170	170
Filter Inlet Conn.	Inches BSPM	1	1	1	1
Filter Outlet Conn.	Inches BSPM	1	1	1	1
Drain Conn.	Inches BSPM	3/4	3/4	3/4	3/4
Qty of Gravel	Bags	0.5	0.5	0.75	1.5
Qty of FILTERAG+	Bags	1	1.5	2	2.5
Electrical Power	Watts	1.2	1.2	1.2	1.2

PRESSURE 1.7 Bar MAXIMUM OPERATING TEMPERATURE 45.0C

HEADROOM - Allow 100 mm greater than overall height.

11.2.2 FILTER AG + Series Filters CAP1665 to CAP2469

Model		CAP1665	CAP1865	CAP2160	CAP2469
Valve		WS1.5	WS1.5	WS2	WS2
Filter Vessel		1665	1865	2160	2469
Parameter	Unit				
Height of Filter	Mm	1988	2088	2098	2348
Diameter of Filter	Mm	407	460	534	610
Height of Valve	mm	170	170	170	170
Filter Inlet Conn.	Inches BSPM	1	1	1.5	1.5
Filter Outlet Conn.	Inches BSPM	1	1	1.5	1.5
Drain Conn.	Inches BSPM	1	1	1.5	1.5
Qty of Gravel	Bags	1.5	2	3	5
Qty of Sand	Bags	4	5	6	8
Electrical Power	Watts	1.2	1.2	1.2	1.2

PRESSURE 1.7 Bar MAXIMUM OPERATING TEMPERATURE 45.0C

HEADROOM - Allow 100 mm greater than overall height.

FILTER AG + Series Filter

Installation Operation Maintenance Manual

12.0 SPARES LIST

12.1 WS1 Valves

PART NO.	DESCRIPTION
XCV3011	Piston
XFR1	Riser Tube c/w 1" Dist
XCV3005	Seal & Spacer kit
XCV3107-01	Drive Motor 12v
XCV3108	PCB
VDLFC3	3/4" Brass flow controller (please specify)
VDLFC4	1" Brass flow controller (please specify)

12.2 WS1.5 Valves

PART NO.	DESCRIPTION
XCV3407	Piston
XCV3430	Seal & Spacer kit
XCV3107-01	Drive Motor 12v
XCV3108	PCB

12.3 WS2 Valves

PART NO.	DESCRIPTION
XCV3725	Piston
XCV3729	Seal & Spacer kit
XCV3107-01	Drive Motor 12v
XCV3108	PCB

FILTER AG + Series Filter

Installation Operation Maintenance Manual

13 CE Certificate

Manufacturer's Declaration of Conformity

We the undersigned

EURAQUA UK, HITCHIN, ENGLAND

Certify that the product

TYPE: FILTER AG + FILTER WITH WS1, WS 1.5 or WS2 AC VALVE

has been designed and manufactured in accordance with the specifications of the following:

Directive

Machinery Directive 89/392/EEC
Low Voltage Directive 73/23/EEC
EMC-Directive 89/336/EEC

Standard

EN 292-1, EN 292-2
EN 60 335-1
EN 55 014



RT Adam

03/01/02 Director

Hitchin, England

Issue place & date